

## An update on KC Metro highway projects

Week of December 12, 2022

**Updated December 12**

Contact: Delaney Tholen, [delaney.tholen@ks.gov](mailto:delaney.tholen@ks.gov)

KDOT website: [Kansas City Metro releases Kansas City Metro Projects List](#)

Facebook: [/NEKansasKDOT](#)

Twitter: [@KansasCityKDOT](#)

Nextdoor: [Kansas Department of Transportation – District 1](#)

KDOT: [www.ksdot.org](http://www.ksdot.org)

For additional road condition details, check KDOT's updated traveler information website, [www.KanDrive.org](http://www.KanDrive.org).

---

**PLEASE NOTE: I-635/K-5 bridge replacement project has been completed. NB K-5 to SB I-635 ramp and all lanes are open to traffic.**

---

## JOHNSON COUNTY

*KDOT construction projects affecting traffic:*

**K-10/Lexington Ave.**, start date **October 28, ONGOING – UPDATED**. Interchange improvement project; work will address capacity improvements to the K-10 entrance and exit ramps at Lexington Ave. and will add a lane to each of the EB and WB ramps. An additional left turning lane will be added to each K-10 entrance ramp from Lexington Ave. and traffic signals will be installed at the EB K-10 entrance and exit ramps. NB and SB Lexington Ave. will have a single lane closed in each direction, from 91<sup>st</sup> St. to 95<sup>th</sup> St., which will remain closed until mid-December. WB K-10 ramps will remain closed through December 12. EB K-10 entrance and exit ramps at Lexington Ave. will close shortly after and reopen in early February, weather permitting. Work will take place daily, Monday through Friday, and Saturdays, as needed, from 7 a.m. to 4 p.m. **Please see “Short-Term Closures” for applicable daily closure info.** Project completion expected by February 2023.

**City of Gardner project. U.S. 56, E. Main St. to New Century Pkwy.**, start date **March 1, ONGOING – UPDATED**. Pavement reconstruction project; improvements include roadway, driveway and sidewalk reconstruction, curb and gutter replacement, additional turning lane and updated traffic signal infrastructure. U.S. 56/E. Main St. will be reduced to one lane in each direction (with 11 ft. width restriction) between Sycamore St. and east of Moonlight Rd. for the duration of the project. Access to some side roads from E. Main St. will be restricted. Work will occur Monday through Friday from 7 a.m. to 5:30 p.m., with work on Saturday as needed. Project completion expected by July 2023.

---

## WYANDOTTE COUNTY

*KDOT short-term closures:*

**Fairfax Tfwy./EB I-70, December 6 – January 31, NEW.** Fairfax Tfwy. will have single ramp approach lane closed and **ramp closed** (Fairfax Tfwy. to EB I-70 entrance ramp) for pavement repair work.

**EB I-70 at I-635, December 13, NEW.** Double left lane closure and **ramp closed** (SB I-635 to EB I-70) from 9 a.m. to 3:30 p.m. for bridge work.

*KDOT construction projects affecting traffic:*

**K-32/Turner Diagonal Fwy./Kaw Dr., start date September 30. ONGOING. Bridge replacement project;** work includes replacement of the EB and WB K-32/Turner Diagonal Fwy. bridges over Kaw Dr. and the Union Pacific Railroad lines. Lane and shoulder closures are scheduled on EB and WB K-32/Turner Diagonal Fwy. from approximately 65<sup>th</sup> St. to 59<sup>th</sup> Ln.; single lane will be open at all times. Crossovers will be built to carry traffic head-to-head through the work zone. Work is scheduled in multiple phases with traffic control placed first to prepare for bridge replacements. Bridge work will begin in March 2023. EB Kaw Dr. will be closed during bridge demolitions in 2023 and 2024. Work will take place Monday through Friday from 7 a.m. to 3:30 p.m. Project will shut down in November for the winter and resume in March 2023 and again from November 2023 to March 2024. Project completion is expected by December 2024.

**NB and SB U.S. 73 (K-7)/Parallel Pkwy., start date September 19. ONGOING. Intersection improvement project;** work includes resurfacing for the installation of a Restricted Crossing U-Turn (RCUT) at the intersection of U.S. 73 (K-7) and Parallel Pkwy. Traffic will be managed in four phases and crossovers will be built to carry U.S. 73 (K-7) traffic head-to-head through the work zone. Phase 1 (September – November 2022): lane and shoulder closures during work hours; single lane to be opened at all times; Phase 2 (March – July 2023): single lane traffic will cross over to travel head-to-head on existing SB lanes; Phase 3 (July – December 2023): single lane traffic will cross over to travel head-to-head on newly constructed NB lanes; and Phase 4 (December 2023): lane and shoulder closures during work hours; single lane to be opened at all times. Work will take place Monday through Saturday from 7 a.m. to 5 p.m. Project will shut down in November for the winter and resume in March 2023. Project completion is expected by December 2023.

**EB and WB K-32, Kaw Dr. to 55<sup>th</sup> St., start date August 9, ONGOING. Pavement improvement project;** work includes concrete pavement patching, pavement smoothness grinding, pavement joint sealing and pavement marking. EB and WB K-32 traffic will be reduced to a single lane for the duration of the project. Work will take place from 7 a.m. to 3:30 p.m., Monday through Friday, and Saturday, as needed. Project completion expected by mid-December.

**I-70/I-635 interchange, start date June 4, ONGOING. Bridge deck reconstruction project;** work includes replacement of bridge deck. **WB I-70 to SB I-635 ramp will be closed for duration of project; detours are marked.** Work will occur Monday through Friday from 7 a.m. to 4 p.m., and Saturdays as necessary, with occasional overnight work from 7 p.m. to 5 a.m. **Please see “Short-Term Closures” for applicable daily closure info.** Project completion expected by late December.

**EB and WB I-70, 78<sup>th</sup> St. to Lewis and Clark viaduct bridge, start date May 7, ONGOING - UPDATED.** Pavement improvement project; double lane closures on I-70 and **ramps closed as**

**needed** in project area. Work will occur overnight, weather permitting. **Please see “Short-Term Closures” for applicable nightly closure info**; completion expected by early December.


**Unified Government project; 7<sup>th</sup> St./Central Ave. intersection**, start date **March 1, ONGOING**. **Roadway and intersection improvement project**; work will include new traffic signal at the intersection, widening of the curb radii to better accommodate truck traffic, new asphalt surfacing, storm sewer upgrades, reconstruction of curb and gutter and pedestrian ramps and new pavement markings and traffic signs. On-street parking will not be available along 7th St. during project. **Please see “Short-Term Closures” for applicable daily closure info**. Work will occur 7 a.m. to 6 p.m., Monday to Friday, and Saturdays as necessary; project completion expected by late November.

---

*KDOT urges all motorists to be alert and obey the warning signs when approaching and driving through a work zone. Drive safely and always wear your seat belt. Unsubscribe from this email list by emailing [delaney.tholen@ks.gov](mailto:delaney.tholen@ks.gov) (please include Unsubscribe in the Subject line).*

---

### **CURRENT KC METRO HIGHWAY KDOT PROJECT MAP**

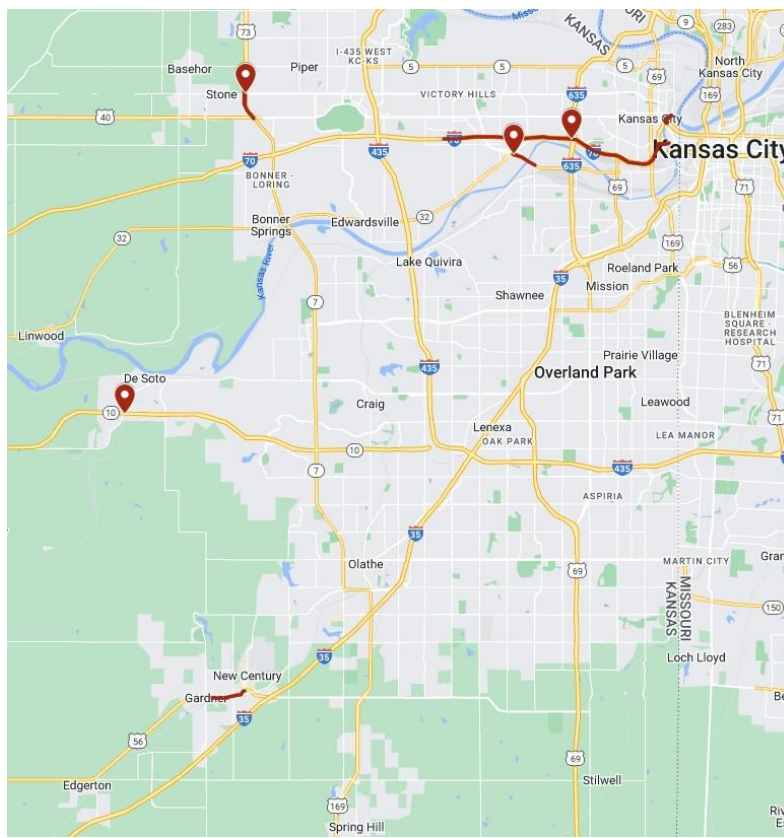

###

This information can be made available in alternative accessible formats upon request. For information about obtaining an alternative format, contact the KDOT Division of Communications, 700 SW Harrison St., 2<sup>nd</sup> Fl. West, Topeka, KS 66603-3745 or phone 785-296-3585 (Voice) / 7-1-1 (Hearing Impaired).

**Click below to connect to KDOT’s Social Networks:**

